






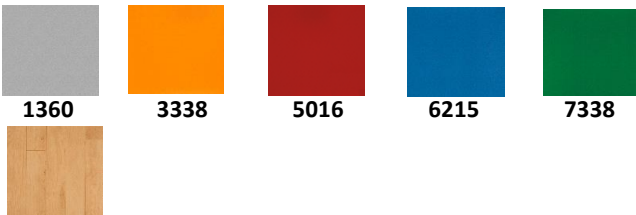

## GYMFIT 50

Property	Standard	Unit	Result
<b>DESCRIPTION</b>			
Surface	PUR laque layer		
Backing	Closed cell PVC Foam		
Thickness	EN ISO 24346	mm	5
Top layer	EN ISO 24340	mm	0,7
Weight	EN ISO 23997	g/m <sup>2</sup>	2900
Width	EN ISO 24341	m	2
Standard roll length	EN ISO 24341	m	20 ± 10%
<b>CLASSIFICATION</b>			
Product specification	EN 651 Vinyl floor covering for indoor sport purposes Meets the requirements of EN 14904 on sub-construction		
Impact sound insulation	EN ISO717-2	dB	N/A
Thermal resistance	-	m <sup>2</sup> K/W	0,045
Reaction to fire	EN 13501	-	C <sub>fl</sub> -s1
<b>SPORT PROPERTIES</b>			
Friction	EN 13036-4	-	80-110
Shock absorption	EN 14808	%	14
Vertical deformation	EN 14809	mm	0,33
Ball rebound	EN 12235	%	100
Specular gloss	EN 2813	%	< 30
<b>TECHNICAL CHARACTERISTICS</b>			
Dimension stability	EN ISO 23999	%	± 0,2
Indentation resistance	EN 1516	mm	<0,5
Resistance to rolling load	EN 1569	1500 N	no damage
Colour fastness	ISO 105 B02	-	6
Chemical resistance	EN ISO 26987	-	no change
Abrasion resistance	EN ISO 5470-1	mg/1000cycles	< 250
<b>OTHERS</b>			
			
2519-371			
Warranty:		Cleanability:	Easy to clean
Hygiene:		Environmental attributes:	 
No periodic renewal needed: Solvent and heavy metal free.			

**GRABOPLAST Floor Covering Manufacturers Ltd.**

H-9023 Győr, Fehérvári út 16/b tel.: (36) 96 506 100

mail@graboplast.hu www.graboplast.hu